


CodeSet 758 - MANCHESTER




See: Command 039



Command 039 is used to execute CodeSet 758 (Manchester codes).

The CodeSet holds a number of parameters, allowing you to manipulate the behavior of the signals. You can instruct the code to be send as timing or frequency variants on 38 KHz, 56 KHz, etc.

0100039758<1><2><3><4><5><6><7>CHK

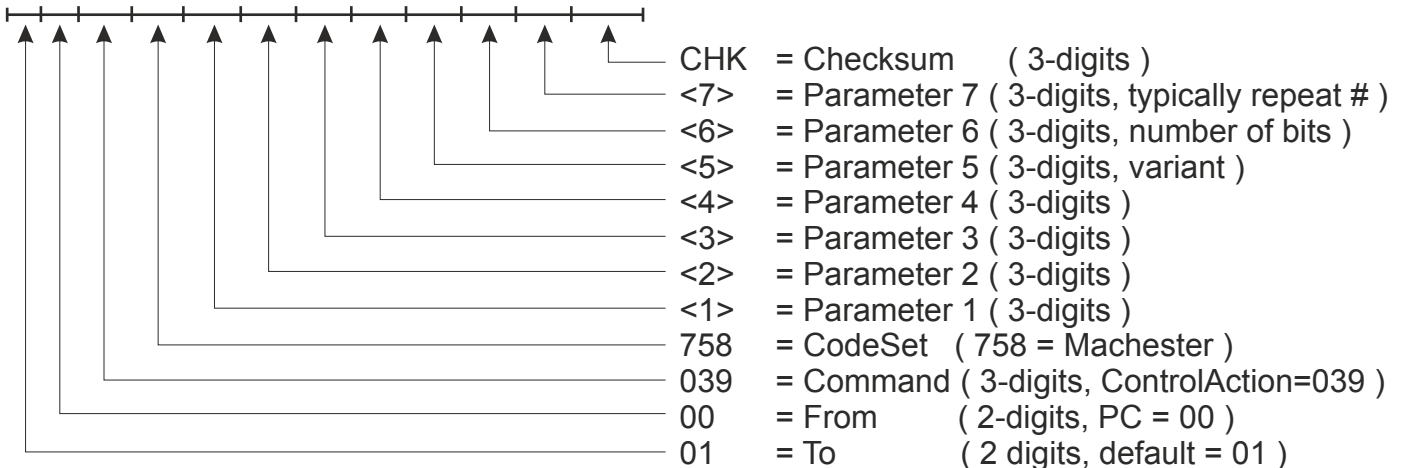


Currently supported variants/combinations:

BITS	VAR	
18	000	38 KHz
	001	56 KHz
	002	32 KHz
23 bits	000	38 KHz
	001	56 KHz, toggle bit, repeated code
	002	56 KHz, toggle bit, repeated code

CanalPlus G55 SAG1


23 bits, 56 Khz, variant 002, repeated code uses toggle bits

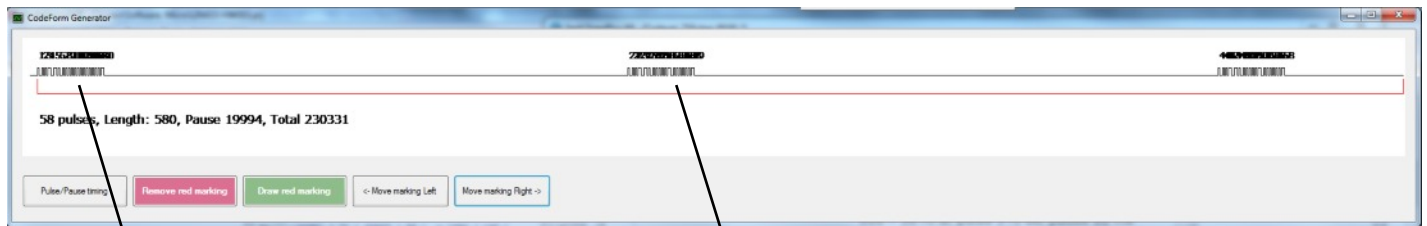

758069128001000000023003



758069129001000000023003



Pulse, Pause in micro-seconds

- 00249 (19) 00499 (37) = 748 (56) - 2 / 1
- 00249 (19) 00249 (19) = 498 (38) - 2 / 2
- 00249 (19) 00249 (19) = 498 (38) - 2 / 2
- 00499 (37) 00499 (37) = 998 (74) - 2 / 2
- 00499 (37) 00249 (19) = 748 (56) - 1 / 2
- 00249 (19) 00499 (37) = 748 (56) - 2 / 1
- 00249 (19) 00249 (19) = 498 (38) - 2 / 2
- 00249 (19) 00249 (19) = 498 (38) - 2 / 2
- 00249 (19) 00249 (19) = 498 (38) - 2 / 2
- 00249 (19) 00249 (19) = 498 (38) - 2 / 2
- 00249 (19) 00249 (19) = 498 (38) - 2 / 2
- 00249 (19) 00249 (19) = 498 (38) - 2 / 2
- 00249 (19) 00249 (19) = 498 (38) - 2 / 2
- 00249 (19) 00249 (19) = 498 (38) - 2 / 2
- 00249 (19) 00249 (19) = 498 (38) - 2 / 2
- 00249 (19) 00249 (19) = 498 (38) - 2 / 2
- 00249 (19) 00249 (19) = 498 (38) - 2 / 2
- 00499 (37) 88350 (6715) = 88849 (6752) - 182 / 1