

LinTronic


<http://www.lintronic.dk>

CANON PROJECTOR SX80







Special notes:
Baudrate/protocol is:
19200 bps, n, 8, 2




Female

You will need a crossed cable with male connectors in both ends

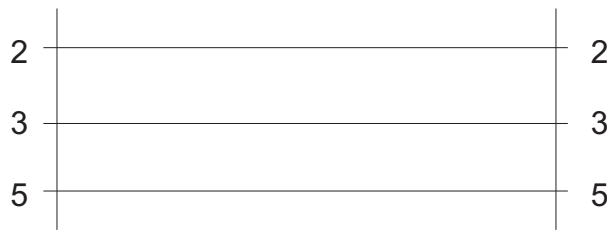

Male

Insert the DB09 male connector into the TableTop's RS232 connector

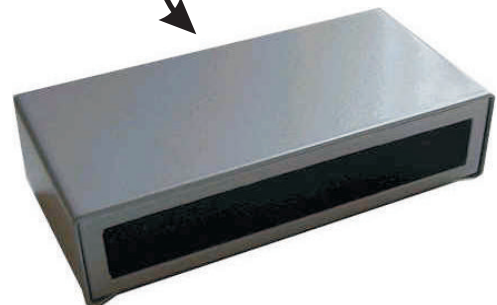

In TT455-RT-238's Memory Map, use commands:
Canon, Projector, RS232 SX80